

CRANK REWIND (PINION GEAR) REELS



1" TO 3" HOSE CRANK MANUAL REWIND

Standard Equipment

- 500 psi
- Ball bearings both sides
- 4 to 1 gear ratio
- Powder coat finish

American Reels crank rewind hose reel, the reliable and efficient solution designed to quickly and easily retract your hoses without the need for a motor or spring. The hand-crank mechanism allows for easy rewinding of the hose, while the durable construction is made to withstand heavy use and exposure to the elements.

On this model, the crank connects to a pinion gear and bevel gear at the front, providing a 4:1 mechanical advantage. This means that 4 rotations of the handle = 1 rotation of the reel. This provides a very smooth operation with less force.

This hand crank rewind hose reel is ideal for a variety of applications for commercial and industrial use for instance that do not require any external power source for operation. These reels can be mounted on walls, floors, or ceilings for convenience and come in a variety of sizes to accommodate hoses of different lengths and diameters.

RUGGED BY DESIGN


775.246.1000 | WWW.AMERICANREELS.COM

CRANK REWIND REELS

1" TO 3" HOSE

When ordering - Please supply the following information.

- 1 - Model number of reel
- 2 - Right or left hand inlet
- 3 - Top or bottom wind
- 4 - Straight or elbow inlet
- 5 - Product to be handled

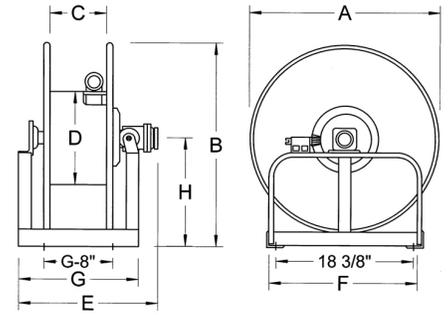

Model	Hose		Dimensions in Inches						
	I.D.	Length	A	B	C	D	E	F	G
C1115-20-10	1"	50'	20	21 1/2	15	11	25	20	22
C1110-22-10	1"	50'	22	23 1/2	10	11	20	20	17
C1108-25-10	1"	50'	25	26 1/2	8	11	18	20	15
C1125-20-10	1"	100'	20	21 1/2	25	11	35	20	32
C1115-22-10	1"	100'	22	23 1/2	15	11	25	20	22
C1112-25-10	1"	100'	25	26 1/2	12	11	22	20	19
C1120-22-10	1"	150'	22	23 1/2	20	11	30	20	27
C1115-25-10	1"	150'	25	26 1/2	15	11	25	20	22
C1110-28-10	1"	150'	28	29 1/2	10	11	20	20	17
C1125-22-10	1"	200'	22	23 1/2	25	11	35	20	32
C1120-25-10	1"	200'	25	26 1/2	20	11	30	20	27
C1115-28-10	1"	200'	28	29 1/2	15	11	25	20	22
C1112-22-12	1 1/4"	50'	22	23 1/2	12	11	22	20	19
C1110-25-12	1 1/4"	50'	25	26 1/2	10	11	20	20	17
C1120-22-12	1 1/4"	100'	22	23 1/2	20	11	30	20	27
C1115-25-12	1 1/4"	100'	25	26 1/2	15	11	25	20	22
C1125-22-12	1 1/4"	150'	22	23 1/2	25	11	35	20	32
C1120-28-12	1 1/4"	150'	28	29 1/2	20	11	30	20	27
C1115-22-15	1 1/2"	50'	22	23 1/2	15	11	25	20	22
C1112-25-15	1 1/2"	50'	25	26 1/2	12	11	22	20	19
C1110-28-15	1 1/2"	50'	28	29 1/2	10	11	20	20	17
C1130-22-15	1 1/2"	100'	22	23 1/2	30	11	40	20	37
C1125-25-15	1 1/2"	100'	25	26 1/2	25	11	35	20	32
C1120-28-15	1 1/2"	100'	28	29 1/2	20	11	30	20	27
C1130-25-15	1 1/2"	150'	22	26 1/2	30	11	40	20	37
C1125-28-15	1 1/2"	150'	28	29 1/2	25	11	35	20	32
C1135-25-15	1 1/2"	200'	25	26 1/2	35	11	45	20	42
C1130-28-15	1 1/2"	200'	28	29 1/2	30	11	40	20	37
C1615-28-20	2"	50'	28	30	15	16	25	20	22
C1610-36-20	2"	50'	36	38	10	16	20	25	17
C1630-28-20	2"	100'	28	30	30	16	40	20	37
C1620-36-20	2"	100'	36	38	20	16	30	25	27
C2020-36-30	3"	50'	36	38	20	20	30	25	27

* For solid rims deduct 1" to E & G dimensions.
Specifications are subject to change without notice.



American Reels is a brand of
United Equipment Accessories, Inc.

15 Airpark Vista Blvd • Dayton, NV 89403 • 775-246-1000
www.americanreels.com • sales@americanreels.com

Copyright © 2023 United Equipment Accessories, Inc.