

# SPRING OPERATED REELS



**1/4" TO 1/2" HOSE**  
AIR, WATER, LUBRICATION



#### Standard Equipment

- Hose included on air & water reels
- Positive lock & unlock ratchet ( non sparking )
- 800 psi on air & water reels
- 3,000 psi on oil reels
- 10,000 psi on grease reels
- Roller guides for wall, ceiling or surface mount
- Powder coat finish

**Our spring operated reels for air, water and lubrication come in a variety of sizes and configurations to accommodate a wide range of conditions in commercial and industrial settings.** These reels are designed to retract the hose automatically when not in use, making them a convenient and space-saving solution.

American Reels, spring operated reels are a reliable and efficient way to manage hoses and fluids in industrial settings. They can improve workplace safety, increase productivity, and reduce maintenance costs by keeping hoses organized and easily accessible.

**RUGGED BY DESIGN**

775.246.1000 | [WWW.AMERICANREELS.COM](http://WWW.AMERICANREELS.COM)


# SPRING OPERATED REELS

1/4" TO 1/2" HOSE

AIR, WATER, LUBRICATION

When ordering - Please supply the following information.

- 1 - Model number of reel
- 2 - Product to be handled

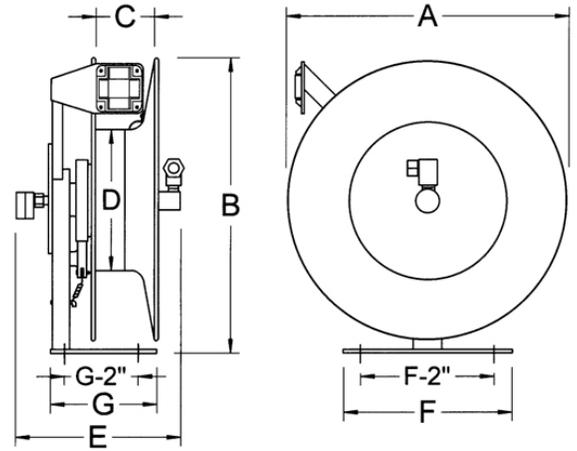

## AIR / WATER REELS

Model	Hose		Dimensions in Inches							Max Pressure
	I.D.	Length	A	B	C	D	E	F	G	
SB3C1-02	1/4"	20'	12	13 1/2	3	7	7 1/2	8	5	800 PSI
SD4A2-02	1/4"	50'	16	17 1/2	4	10	8 1/4	8	5	800 PSI
SD4A2-03	3/8"	35'	16	17 1/2	4	10	8 1/2	8	5	800 PSI
SF4C2-03	3/8"	50'	20	21 1/2	5	10	9 1/2	10	8	800 PSI
SD4C2-05	1/2"	25'	16	17 1/2	4	10	8 1/2	8	5	800 PSI
SF4C2-05	1/2"	50'	20	21 1/2	5	10	9 1/2	10	8	800 PSI

## LUBRICATION REELS

Model	Hose		Dimensions in Inches							Max Pressure
	I.D.	Length	A	B	C	D	E	F	G	
SD4C2-02H	1/4"	35' Grease	16	17 1/2	4	10	8 1/4	8	5	10,000 PSI
SF4D2-02H	1/4"	50' Grease	20	21 1/2	5	10	9 1/4	10	8	10,000 PSI
SD4C2-03H	3/8"	25' Grease	16	17 1/2	4	10	8 1/4	8	5	10,000 PSI
SF4D2-03H	3/8"	40' Grease	20	21 1/2	5	10	9 1/4	10	8	10,000 PSI
SD4C2-03L	3/8"	25' Hvy. Oil	16	17 1/2	4	10	8 3/4	8	5	3,000 PSI
SF4D2-03L	3/8"	50' Hvy. Oil	20	21 1/2	5	10	9 1/2	10	8	3,000 PSI
SD4C2-05L	1/2"	25' Hvy. Oil	16	17 1/2	4	10	8 3/4	8	5	3,000 PSI
SF4D2-05L	1/2"	45' Hvy. Oil	20	21 1/2	5	10	9 1/2	10	8	3,000 PSI

\* For crank reel, change first letter to KC.

Specifications are subject to change without notice.



American Reels is a brand of  
United Equipment Accessories, Inc.

15 Airpark Vista Blvd • Dayton, NV 89403 • 775-246-1000

www.americanreels.com • sales@americanreels.com

Copyright © 2023 United Equipment Accessories, Inc.

2/23